


NORDOCK BARRIER GATE

Description


The Nordock Powered Safety Barrier Gate is Designed to Prevent Lift Trucks From Falling Off Loading Docks or Entering Trailers Prior to the Dock Leveler or Restraint being Properly Positioned. The Full Height Vertical Posts Also Help Prevent Door Impact Damage. The Entire Unit is Painted Yellow For Excellent Visibility. Positioning and Signal Switches are Provided for Interconnects to Restraint and Dock Leveler.



Construction

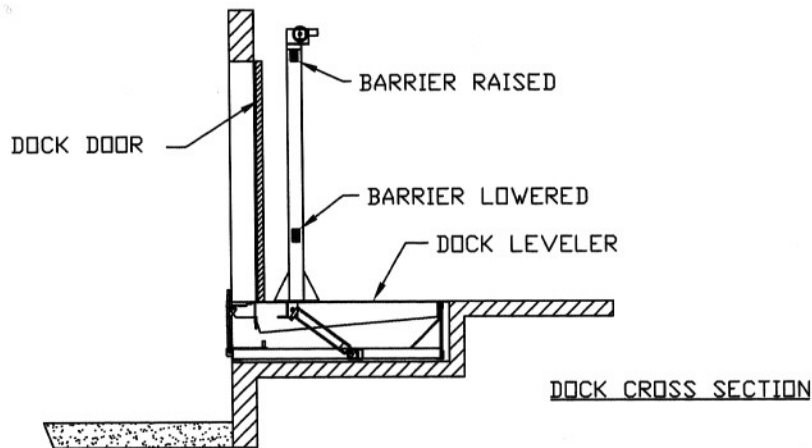Heavy Duty Structural Vertical Posts and Horizontal Barrier to Withstand Substantial Impacts. Gusseted Base Plates With Floor Anchor Holes Attach Directly to Existing Building Floor. Drive Motor is 120Volt 1/4HP Direct Coupled to Drum Shaft. Lifting Cable is Galvanized Aircraft Type.

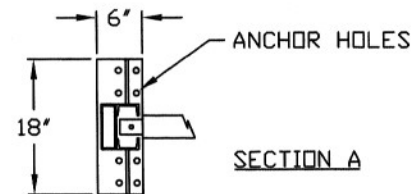

DOCK CROSS SECTION



(L.D.)	QTY.	DESCRIPTION	MATL	REMARKS
 PMH Material Handling Phone: 888-557-1515 Fax: 888-564-2525 e-mail: Sales@pmhmaterialhandling.com			SAFETY BARRIER GATE MODEL SG	
DO NOT SCALE DRAWING - UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES ANGULAR TOL. ±0°30' FRAC. TOL. ±1/32" DEC. TOL. ±.010				
DATE:	6/02	DR:	DG	APP'D:
SHEET #	1 OF 1	DWG. NO.:	50-0002	REV:
				

THE INFORMATION HEREON IS THE PROPERTY OF NorDock Inc. BY ACCEPTING THIS INFORMATION THE BORROWER AGREES THAT IT WILL NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS PROVIDED.