


PLAN VIEW

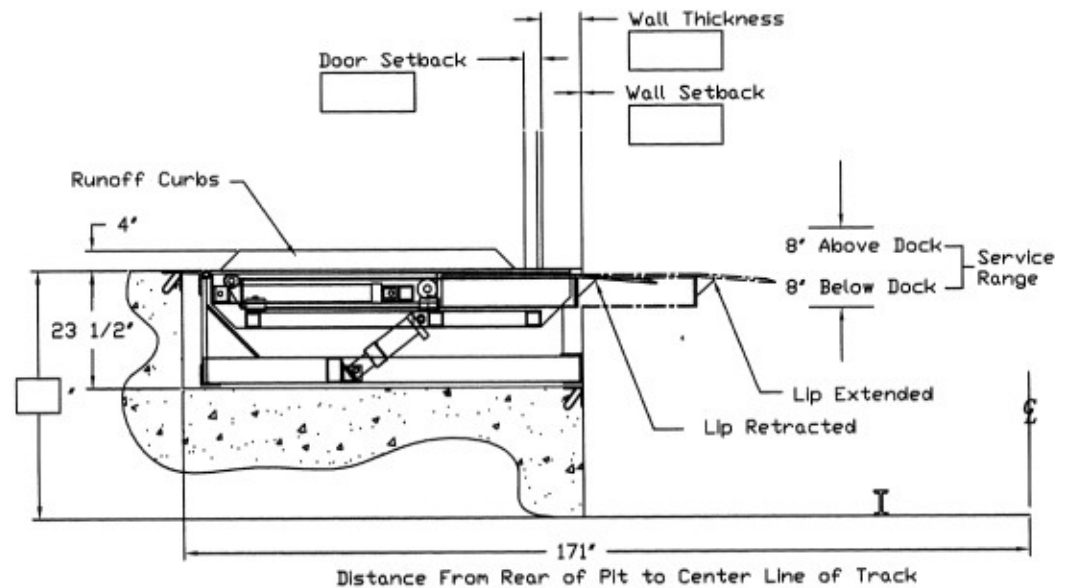

MODEL SRD ORDER INFORMATION

Feature Summary:

Fully Hydraulic Push Button Operation Including Lift, Lip Extend & Retract & Stop. Hydraulic Extension Allows Inching of the Lip In & Out of Rail Car Without the Need for End Load Arms. Automatically Retracting Support Legs Position the Deck for Storage Level With the Dock Floor. Side Deck Curbs Constructed of Solid Steel 4' High.

Construction:

Deck Plate, Lip Plate, Beam Sections are of Minimum 50KSI Material. Power Unit Includes A 1 HP TENV Motor Prewired and Fully Plumbed & Tested. Control Panel is NEMA 12 Wall Mounted With 120 Volt Secondary Voltage. Hydraulic Cylinders are Heavy Duty Regenerative Type With Polished Chrome Rods, Guide Bearings and High Pressure Seals. Hoses are SAE 100R2 High Pressure. Continuous Rear Hinge With SAE 1045 Zinc Plated Rod Coated With Anti-Seize Lubricant.

Operation:

Operator Pushes the Raise Button to the Top of Travel, Then Pushes the Extend Button to Move the Lip Section Towards the Rail Car. Releasing the Extend Button Allows the Deck to Lower & Pushing the Extend or Retract Button Holds the Deck in it's Vertical Position. The Operator Inches the Lip In & Out to Position it Firmly On the Rail Car. To Park the Dock, Push the Raise Button Until the Deck is Above the Floor, Then Push the Retract Button Until the Lip is Fully Back. Releasing the Button Allows the Deck to Float to the Stored Position, Level with the Floor.

RAMP WIDTH _____' CAPACITY _____ LBS.
 QUANTITY _____ ORDER DATE _____
 DOCK TO CENTERLINE OF FIRST RAIL* _____'
 DOOR OPENING WIDTH _____' DOCK HEIGHT _____'
 RAIL CAR HEIGHT RANGE _____
 CURVED TRACK YES NO (IF YES, A SITE PLAN IS REQUIRED)
 VOLTAGE SUPPLY 208 230 460 600
 BILL TO: _____
 SHIP TO: _____
 * IF LESS THAN 80' SIGNED CUSTOMER APPROVAL IS REQUIRED.
 NAME & POSITION _____

(I.D.)	QTY.	DESCRIPTION	MATL	REMARKS
		MODEL SRD - RAIL DOCK Approval Drawing		
		Pittsburgh Material Handling PH: 888-557-1515 FAX: 888-564-2525		
<small>DO NOT SCALE DRAWING - UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES ANGULAR TOL. ±0.30° FRAC. TOL. ±1/32" DEC. TOL. ±.010</small>				
<small>DATE:</small>		<small>DR:</small>	<small>APPD:</small>	<small>SCALE:</small> NTS
<small>SHEET #</small> OF		<small>OWG. NO.:</small> 49-0037		<small>REV:</small> △
<small>THE INFORMATION HEREON IS THE PROPERTY OF NorDock Inc. BY ACCEPTING THIS INFORMATION THE BORROWER AGREES THAT IT WILL NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS PROVIDED.</small>				